

# 2" LIQUID RELIEF VALVE




762-7601-2

High Pressure  
To ---- 18,000#

Pressure Control

High Volume  
To ---- 210 GPM

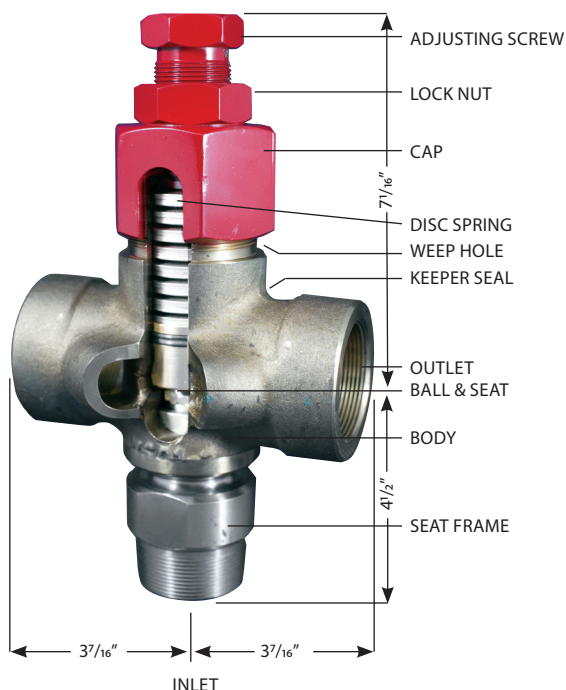

Designed for protection against over-pressure for vessels, pumps, lines, etc. It is a rugged and versatile valve capable of handling a wide range of pressures.

**Body:** 2" Aluminum-Bronze or 316SS

**Ball & Seat:** Sheralloy® Assembly (Cobalt Base Alloy)

**Spring:** Disc Spring

**Inlet:** 2" Male NPT, 1-1/2" Male NPT or Victaulic

**Outlet:** Dual - 2" Female NPT or Victaulic

**Weep Hole:** Any flow from weep hole indicates keeper seal is worn and should be replaced.

**USE ONLY AS DIRECTED**  
Do not deviate from Manufacturer's recommended pressure range and mode of installation

ALUMINUM-BRONZE PART NUMBER	WORKING PRESSURE RANGE	VOLUME (GPM) AT 25% OVER SET PRESSURE	SPRING ARRANGEMENT AND QUANTITY	SEAT ORIFICE DIAMETER	CAP COLOR CODE
762-7601-2 -LLP	100-600#	35-140	Thin 1 X 1 (19)	1-1/8"	White
762-7601-2-LP	400-1500#	30-180	Reg 1 X 1 (15)	1-1/8"	Yellow
762-7601-2-MP	500-4000#	35-210	Reg 2 X 2 (18)	1-1/8"	Green
762-7601-2-HP	1000-8000#	Not Verified	Reg 3 X 3 (18)	1-1/8"	Red
762-7601-2-XHP	2500-10000#	Not Verified	Reg 3 X 3 (18)	3/4"	Black
762-7601-2-SHP	2500-12000#	Not Verified	Reg 3 X 3 (18)	3/4"	Brown
762-7601-2-UHP	3000-18000#	Not Verified	Reg 3 X 3 (18)	1/2"	Tan

**MATERIAL SPECIFICATIONS:**

- Standard valve is Aluminum-Bronze valve.
- Add "316" to part number for 316 Stainless Steel valve.

Method of Installation →

