


1" LIQUID RELIEF VALVE



631-6300-1

High Pressure ---- Pressure Control ---- Low Volume

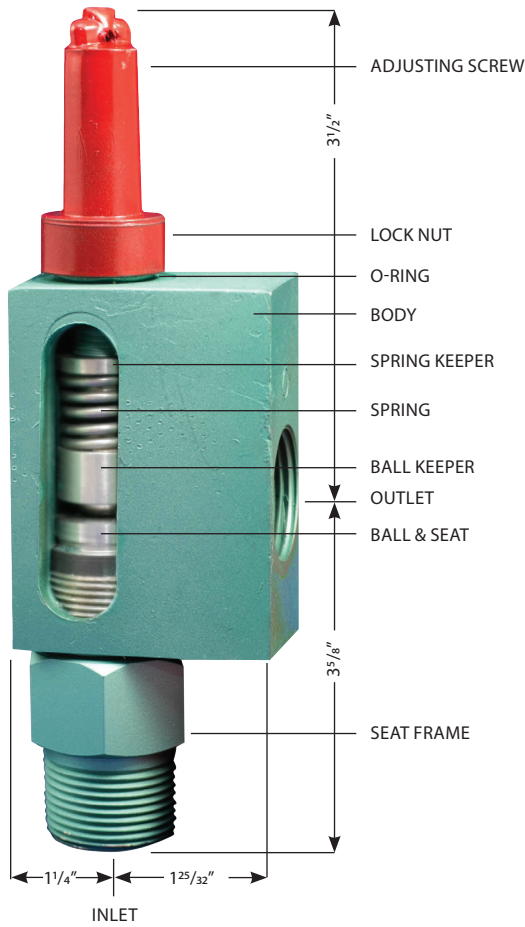

A rugged, economical valve for low pressure, low volume applications. It is adjustable and repairable in the field or in the line.

Body: 1" Carbon Steel or Aluminum-Bronze

Ball & Seat: Stainless or Monel

Spring: Coil

Inlet: 1" Male NPT or 3/4" Male NPT

Outlet: 1" Female NPT

USE ONLY AS DIRECTED

Do not deviate from Manufacturer's recommended pressure range and mode of installation

CARBON STEEL PART NUMBER	WORKING PRESSURE RANGE	SEAT ORIFICE DIAMETER
631-6300-1-BS-LP	5-50#	11/16"
631-6300-1-BS-MP	50-200#	11/16"
631-6300-1-BS-HP	200-1500#	3/8"
631-6300-1-MBS-LP	5-50#	11/16"
631-6300-1-MBS-MP	50-200#	11/16"
631-6300-1-MBS-HP	200-1500#	3/8"

ALUMINUM-BRONZE PART NUMBER	WORKING PRESSURE RANGE	SEAT ORIFICE DIAMETER
631-6300-1-AB-LP	5-50#	11/16"
631-6300-1-AB-MP	50-200#	11/16"
631-6300-1-AB-HP	200-1500#	3/8"